



3F Filippi
LIGHT YOUR VISION

PJ25

the power of precision

PJ25 is **3F Filippi**'s first professional projector, embodying ***solidity*** and ***reliability***.

Its robust and versatile architecture is designed to adapt naturally to different application contexts, transforming lighting technology into a tool capable of enhancing spaces and architecture with continuity and safety.



SOLID
RELIABLE





Available in
double version

XS (small)
XM (medium)



Luminous fluxes

from **6.500 lm**
to **35.000 lm**

Luminous efficiency
up to

185 lm/W




SDCM<3



Colour
temperature

3.000 K
4.000 K

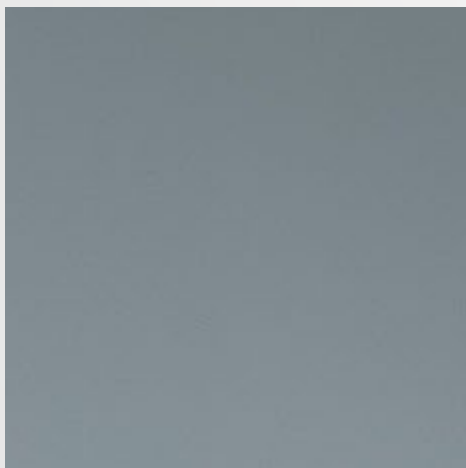

Colour rendering
index

CRI>80

Useful lifetime L90/B10 :

50.000 h
(tq +25°C)



Wiring

ON/OFF
(Class I) &
D2D (Class II)



Setting

MultiWatt
(Available for
ON/OFF)

Input impulse
protection level

6 kV



Product accessible for

**Maintenance
and
Replacement**
of components



Degree

IK08 and IP66




Complies with

EN 60598-2-22
for emergency power
supply


Resistance
to salt spray

>500 h

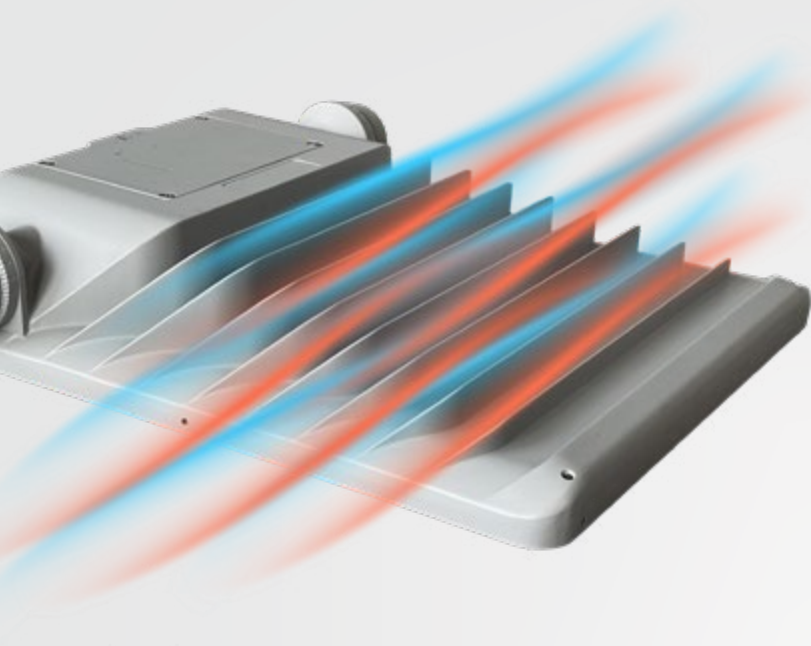

Heat dissipation


The die-cast aluminium body, painted in **RAL 7040 grey**, consists of fins capable of operating at temperatures between **-20°C** and **+40°C**.

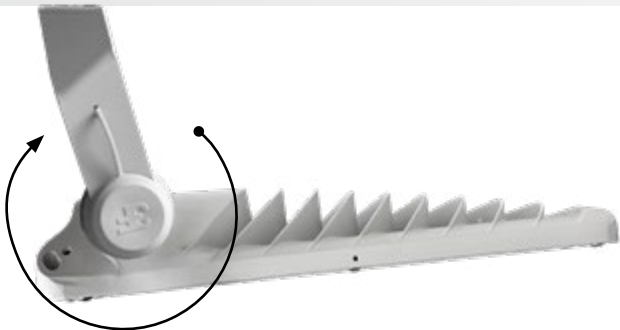


Adjustable tilt

The PJ25 mounting bracket is designed to allow the source to be adjusted in **5°** increments.

ceiling-mounted
bracket supplied

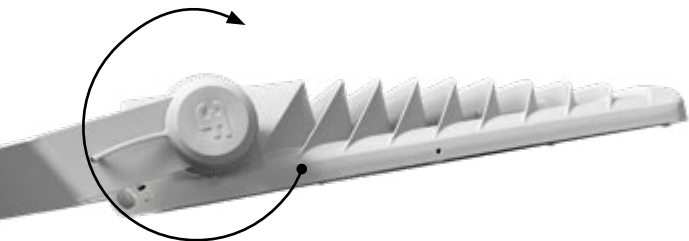

wall-mounted
bracket supplied

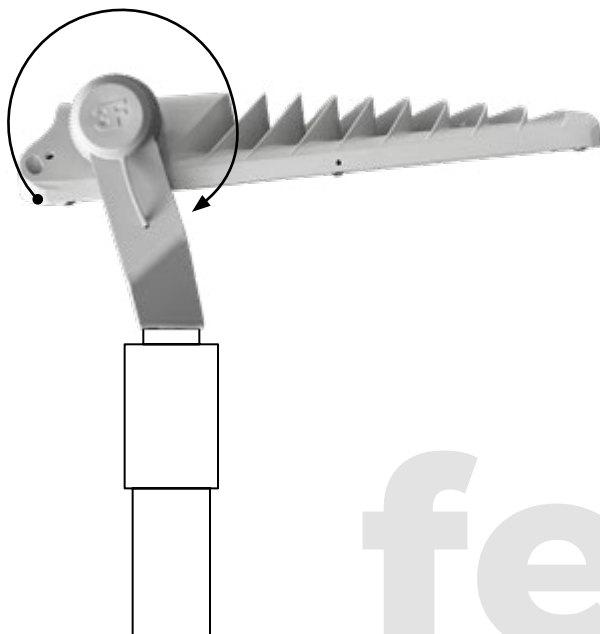

on **pole**
using accessory
(optional)

Models



Class II: D2D versions


MultiWatt 230V-50/60Hz electronic ON/OFF wiring

CODICE	ARTICOLO	W	Im	K	CRI	L x A x H	IP
7800	3F PJ25 XS 7-17000/830 MW AS	38 77 98	6632 12902 16118	3000	>80	270x320x80	66
7801	3F PJ25 XM 26-35000/830 MW AS	140 179 198	24269 30225 32978	3000	>80	350x390x80	66
7802	3F PJ25 XS 7-17000/840 MW AS	38 77 98	7055 13725 17147	4000	>80	265x320x80	66
7803	3F PJ25 XM 26-35000/840 MW AS	140 179 198	25818 32154 35083	4000	>80	345x390x80	66

DALI electronic wiring (DALI-2 DATA) 230V-50/60Hz

CODICE	ARTICOLO	W	Im	K	CRI	L x A x H	IP
7806	3F PJ25 XS 17000/840 D2D II AS	98	17147	4000	>80	265x320x80	66
7807	3F PJ25 XM 35000/840 D2D II AS	198	35083	4000	>80	345x390x80	66

Accessories

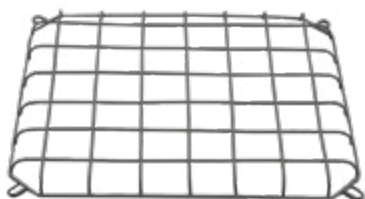

Protective grille

CODE	ARTICLE
A01193	3F PJ25 XS protective grille
A01194	3F PJ25 XM protective grille



Pole head support

CODE	ARTICLE
A01195	Pole head support Ø 60 mm mod. XS/XM



3F Filippi
LIGHT YOUR VISION