



A5236 - Kit LED 3F Cub CR - 150W/840 DALI (VT)

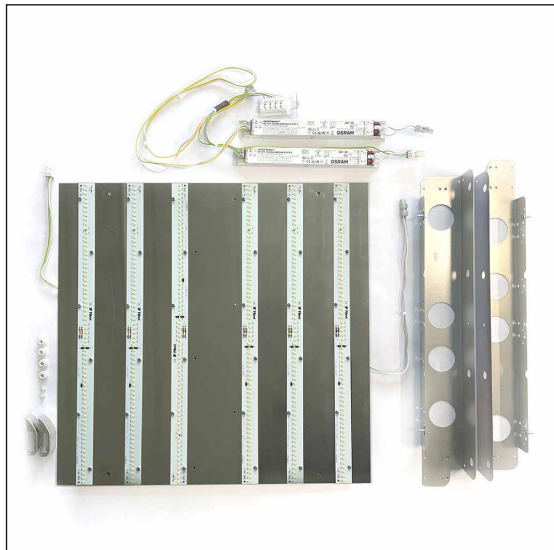

To replace the 4x55W IP64 CR version.

ILLUMINOTECHNICAL

Luminous efficiency 100% (DLOR 100%, ULOR 0%).
 Initial luminous flux of the luminaire 21381 lm.
 Wide symmetric distribution.
 Installation Interdistance Transv.D = 1.09 x hu - Long.D = 1.19 x hu.
 Tabular UGR (CIE 117 - 4H-8H; S=0.25H; 70/50/20): RUG 25.3 - 25.4.
 Beam angle: 108° - 103°.
 Luminous efficacy 134 lm/W.
 Lifetime (L93/B10): 30000 h. (tq+25°C)
 Lifetime (L90/B10): 50000 h. (tq+25°C)
 Lifetime (L80/B10): 80000 h. (tq+25°C)
 Lifetime (L70/B10): 100000 h. (tq+25°C)
 Lifetime (L70/B10): 50000 h. (tq+40°C)
 Sudden decreased luminous flux after 50000 hours: 0% (C0).
 Photobiological safety in compliance with IEC/TR 62778: RG0 risk exempt, (IEC 62471).
 In compliance with IEC/EN 62722-2-1 - IEC/EN 62717 standards.

SOURCE

6 linear LED modules 25W/840.
 Energy efficiency class (UE 2019/2020 - UE 2019/2015): C.
 CIE 13.3 Colour rendering index: CRI >80 (R9 <50%).
 IES TM-30 Fidelity Index: Rf = 84 Rg = 95.
 CCT nominal colour temperature 4000 K.
 Colour initial tolerance (MacAdam): SDCM 3.

MECHANICAL

Aluminium gear-tray unit.
 Tamper-proof closures (2 pieces) to replace the two existing ones.
 Luminaire with limited surface temperature. - D - (EN 60598-2-24)
 Dimensions: 680x680 mm, height 187 mm. Weight 3.4 kg.
 Glow-wire test resistance 960°C.

ELECTRICAL

Halogen Free DALI-2, PUSH-DIM, electronic wiring 230V-50/60Hz, power factor 0.95 at full load, THD <25%, constant output current, class I, 2 driver, 2 DALI addresses.
 Single-circuit wiring.
 Power of the luminaire 159 W.
 CE - IEC 60598-1 - EN 60598-1.
 SAFE FLICKER: PstLM=<1 and SVM=<0.4 (IEC TR 61547-1 and IEC TR 63158), to ensure a more comfortable and safe light.
 Luminaire compliant with EN 60598-2-22 for power supply from a centralised emergency system CPSS (Central Power Supply System), not incorporated in the luminaire - high risk areas excluded. The default power and flux are 100% in AC and 15% in DC.
 Ambient temperature from -20°C to +40°C.
 Temperature class T6 max 85°C.
 Relative humidity UR: <85%.

INSTALLATION

Retrofit.
 Correct installation of the retrofit LED kit, compliant with EN 60598-1 and CE marked, inside the 3F Filippi - 3F Cub Fluorescent luminaires must be only performed by qualified personnel to ensure compliance with the national installation standards.

APPLICATIONS

Evaluate the use of moulded anti-glare glass according to the application.

LIGHT MANAGEMENT

Recommended minimum setting: 10%.
 The device, equipped with DALI-2 driver, can be controlled manually with 3F Easy Dim technology or automatically/manually with 3F Smart Dimming technology and/or centralised DALI systems.
 DALI-2 certification guarantees interoperability with other devices with the same certification.
 In electrical systems without a regulation system (manual or automatic) and DALI bus, a suitable jumper must be made on the DA-DA terminals of the appliance.

WARNING

Fixture not suitable for cold stores with an ambient temperature <0°C and/or relative humidity >85%.
 In order to maintain the degree of protection of the device and for the purposes of validity of the guarantee of the new retrofit kits, it is imperative:

- follow the safety and operating instructions described in the installation instructions
- the use of the two self-drilling screws supplied (one for each driver), will perform the dual function of drilling the body and fixing the driver, while maintaining the fixture's degree of protection
- the replacement of existing tamper-proof closures with new ones
- clean the screen glass to improve efficiency

Luminaire designed for disposal/recycling at end-of-life.
 Replaceable (LED only) light source by a professional. Replaceable control gear by a professional.

Performances are measured and certified by our CTFs2 Photometric Laboratory (EN 13032, IES LM79); Test and Inspections (EN IEC 60598-1, CISPR 15, IEC 61547). Due to the technological evolution of the electronic components, the data provided may be updated, and as such, confirmation must be requested during the order process. Luminous flux and power supply have +/-10% tolerances with respect to the indicated value. tq +25°C (CIE 121).

Dimensions and specifications subject to alterations without notice.

ST.20260410 - Page 1 of 1

3F Filippi S.p.A.

Via del Savena 28, Z.I. Piastrella - 40065 Pian di Macina, Pianoro (Bologna), Italy
 Tax Code. 01033260371 - VAT no. IT00529461204 - Share Capital € 3,000,000 fully paid up
 Bologna Register of Companies no. 01033260371 - REA (economic administrative index) No. 234613

Web www.3F-Filippi.com
e-Mail 3F-Filippi@3F-Filippi.it
Telephone +39.051.6529611
Fax +39.051.775884