


EML60

EML6061

EMERGENZA LED 54V con BATTERIE LiFePO4 LED EMERGENCY 54V with LiFePO4

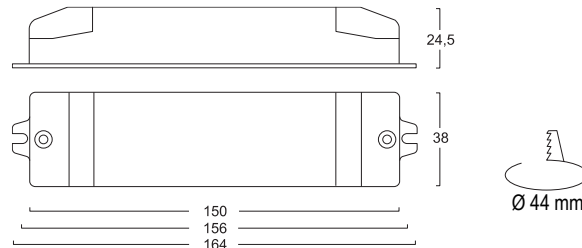

- > Funzionamento in sola emergenza
- > Funzionamento in luce continua in abbinamento con alimentatori elettronici
- > Versione per power led a corrente costante con tensione di funzionamento in modo permanente da 10V a 54V
- > Intervento istantaneo ad ogni mancanza di rete
- > Uscita a potenza costante
- > Batterie al LiFePO4 ad alta temperatura
- > Durata 1 o 3 ore selezionabile mediante jumper
- > Grado di protezione IP20
- > Indicatore di ricarica a LED
- > Protezione contro le scariche prolungate
- > Dispositivo di ricarica con isolamento rinforzato in grado di ricaricare la batteria in modo normale dopo la prova di cui al punto 22.3 della norma CEI EN 61347-2-7:2007
- > Conformità alle norme EN61347-2-13, EN61347-2-7, EN61547, EN55015, EN60598-2-22, EN61000-3-2
- > Durata nominale 100000 ore alla Tc max
- > Maintained or non maintained operation
- > Suitable for electronic driver
- > Suitable for constant current power LED with operating voltage in permanent mode from 10V to 54V
- > Automatic operation
- > Constant power output
- > LiFePO4 high temperature batteries
- > 1 or 3 hours rated duration selectable with plug
- > Degree protection, IP20
- > Charge indicator with led
- > Deep discharge protection
- > Charging device with supply is reinforced insulation able to recharge the battery normally after the test in clause 22.3 of the IEC 61347-2-7:2007
- > Complying with EN61347-2-13, EN61347-2-7, EN61547, EN55015, EN60598-2-22, EN61000-3-2
- > Expected life-time up to 100000h at Tc max

Tensione di alimentazione	220-240V
Corrente di alimentazione	20mA
Range temperatura ambiente	5 ÷ 50°C
Temperatura max sul punto Tc	65°C
Tempo di ricarica	12 h
Distanza max tra alimentatore e lampada	3 m
Portata morsettiera	1,5 mm ²
Foro di montaggio led	8,8 mm
Peso	0,15 Kg
Mains voltage	220-240V
Mains current	20mA
Ambient temperature range	5 ÷ 50°C
Max case temperature on Tc point	65°C
Recharging time	12 h
Max distance between inverter and lamp	3 m
Screwless terminals max connection size	1,5 mm ²
Led mounting hole	8,8 mm
Weight	0,15 Kg

ACCESSORI:

Batteria : LiFePO4 6,4V 1,5Ah

Cablaggio Led:

Led Verde con cavi unipolari Halogen Free

L=400mm o L=800mm.

Led Verde con cavo H03 Halogen Free

L=400mm o L=800mm.

Collegabili ad alimentatori con:

tensione massima in uscita 80V

corrente massima in uscita 1050mA

ACCESSORIES:

Battery: LiFePO4 6.4V 1.5Ah

LED wiring:

Green LED with Halogen Free single-core cables

L=400mm or L=800mm.

Green LED with H03 Halogen Free cable


L=400mm or L=800mm.

Connected to power supplies:

80V maximum output voltage

1050mA maximum output current

1H

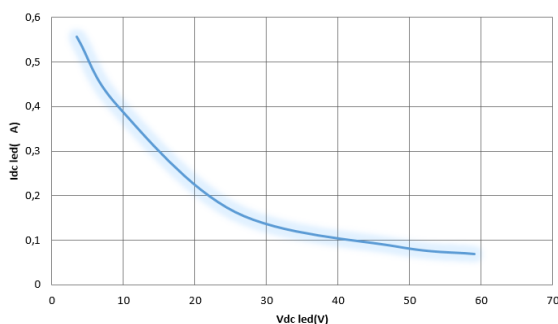

3H

